

SECTION 01580

PROJECT IDENTIFICATION AND SIGNS - Bond

1.1 DESCRIPTION

- A.** This section specifies Project Identification and Signs.


1.2 PROJECT SIGN(S)

- A.** Unless specified otherwise in the Contract Specifications, provide two general construction signs and one Owner's field office sign as specified herein. Construction signs shall be approximately 4 feet by 8 feet in size, mounted on two posts set in the ground where directed. The Owner's field office sign shall be approximately 3 feet by 6 feet in size for wall or post mounting as directed by the Owner. Signs shall be constructed of 3-inch painted waterproof plywood for which the wording and colors will be determined by the Owner.
- B.** Where and as approved by the Owner, the contractor shall erect and maintain a sign identifying the Project and indicating State participation.
1. One (1) sign of each type shall be erected at the project site where and as directed by the Owner for maximum public identification of the work and shall be maintained in good condition until completion of the project. Upon completion, the signs shall be removed.
 2. Signs are to be cut from standard 4' by 8' waterproof plywood sheets, or other suitable material, and shall meet the design standards as shown in the attached figures (Sign Type A - State).
 3. The size may be varied to meet special or local requirements, but proportions shall be maintained.
 4. Information and color of 6" horizontal color band to be included in Sign Type A shall be supplied to the Contractor by the Owner.
 5. No information shall be included on the project signs, except that stipulated in the above paragraphs.
- C.** Maintain signs in good condition until completion of the Project. Remove the signs upon completion when directed by the Owner.
- D.** Display Panel

1. Construction, dimensions, colors and lettering shall be as per MBTA Standards.
2. Verbiage: The Owner shall furnish the text, photograph and other graphics, and the Contractor shall furnish design and layout, and printing which are all subject to the approval of the Owner prior to installation in the display panel. Installation of final, approved product in the display panels shall be made by the Contractor.
3. Quantity: One single sided, dual compartment display panel shall be installed on the job site as directed by the Owner.

1.3 MEASUREMENT AND PAYMENT

- A.** No separate measurement nor payment will be made for work required under this section. All costs in connection therewith shall be considered incidental to the item or items of work to which they pertain.

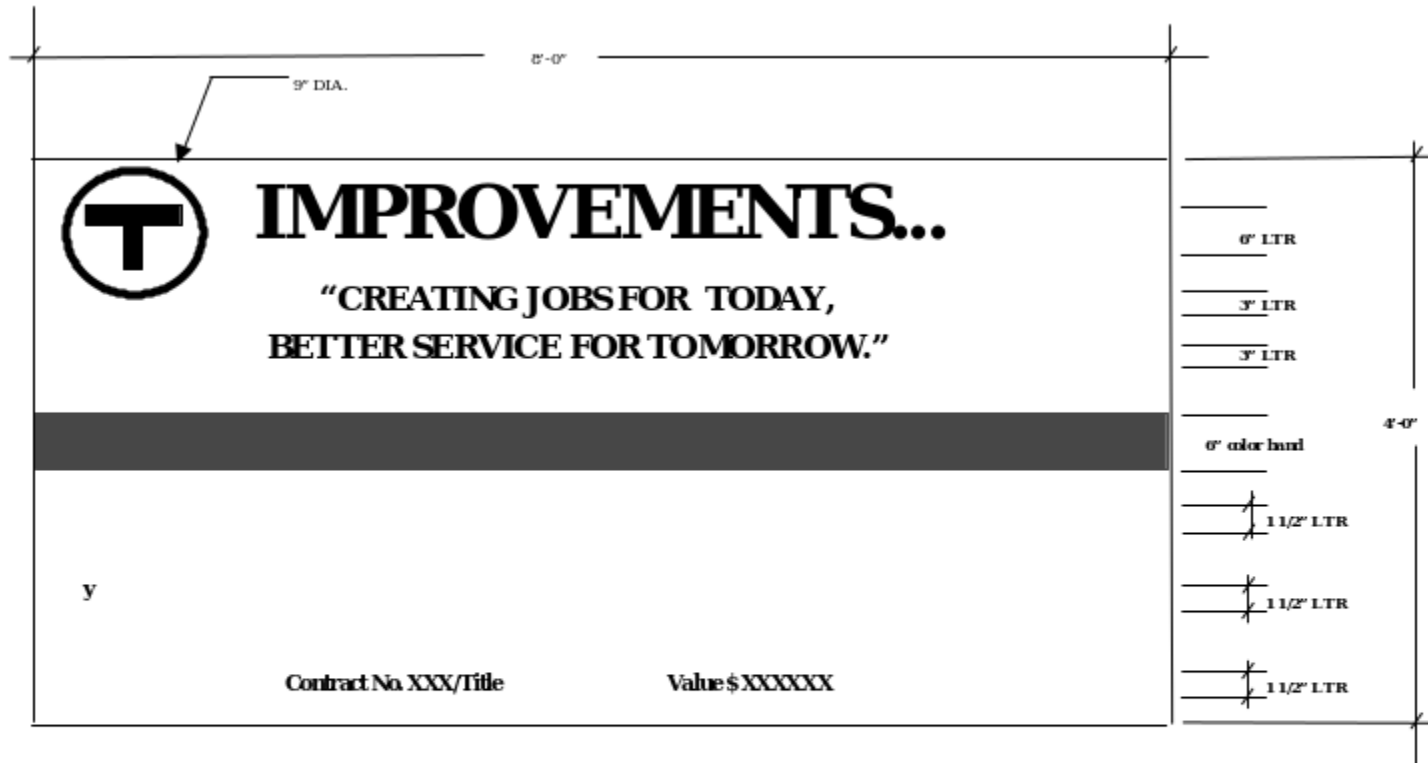

- COLOR BAND TO DENOTE LINE
- TEXT TO BE HELVETICA MEDIUM
- CONTRACT NO. & VALUE TO REFLECT APPLICABLE CONTRACT

SIGN TYPE A
END OF SECTION